



ArcelorMittal Bremen GmbH
 Postfach 210220
 28222 BREMEN
 Carl-Benz-Strasse 30
 20237 BREMEN
 Telefon 0421/6480
 Telefax 0421/6482251

A02 CERTIFICATE
 A03 Page: 01 / 03
20150062918-00

Inspection certificate 3.1 EN 10204

A05 ORIGINATOR OF THE DOCUMENT
 ArcelorMittal Bremen GmbH
 Abnahme/Zeugnisschreibung
 zeugnisse.bremen@arcelormittal.com
 Telefon 0421/6482813

A09 DISPATCH NOTE
 DATE
0000295361
 08.09.2015

A08.1 MANUFACTURER'S ORDER NR
 DATE
 AGENCY'S ORDER NR.
 1548450
 22.06.2015
 FH5IBBY002003

A07 CUSTOMER'S ORDER NUMBER
 P034328/P034328/003


A10 PART NUMBER
 210I750410 4789 3.1

A06.1 CUSTOMER
BE Group OY AB
 Helsingintie 50
 15100 Lahti
 Finland
 A06.2 CONSIGNEE
BE Group OY AB, KEIIVARASTO
VANHANRADANKATU 42
15522 LAHTI
Finland

PRODUCT: hot rolled pickled sheet
 TERMS OF DELIVERY: **EN 10051 (2010)**

QUALITY: **AMSTRONG 355MC**
 STANDARD: **AM FCE**

JITZ 1.71

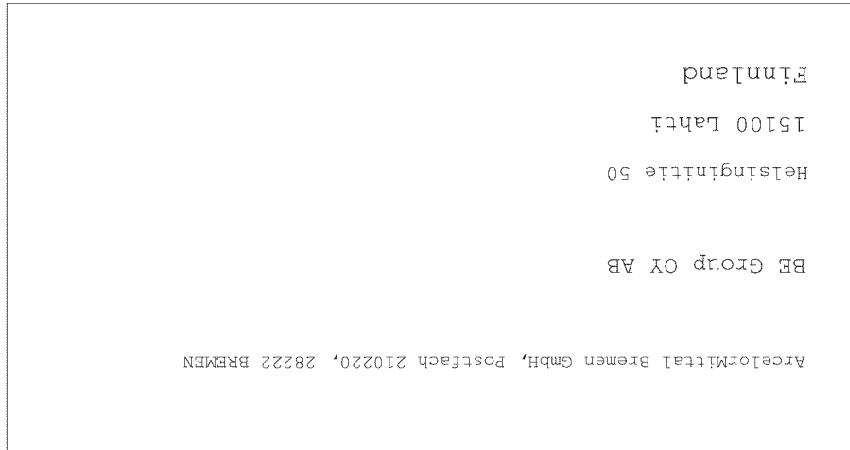

A02 CERTIFICATE Page: 03 / 03
20150062918-00
 Inspection certificate 3.1 EN 10204

A03
20150062918-00

A06.1 CUSTOMER
BE Group OY AB
 Helsingintie 50
 15100 Lehti
 Finland

A06.2 CONSIGNEE
BE Group OY AB, KEILAVARASTO
 VANHANRADANKATU 42
 15522 LAHTI
 Finland

A09 DISPATCH NOTE
 DATE
 A08.1 MANUFACTURER'S ORDER NR
 DATE
 AGENCY'S ORDER NR.

A07 CUSTOMER'S ORDER NUMBER
 P034328/P034328/003

A10 PART NUMBER
 2101750410 4789 3.1

0000295361
 08.09.2015

1548450
 22.06.2015
 FH5IBEY002003

A05 ORIGINATOR OF THE DOCUMENT
 ArcelorMittal Bremen GmbH
 Abnahme/Zeugnisschreibung
 zeugnisse.bremen@arcelormittal.com
 Telefon 0421/6482813
 Telefax 0421/6482251

STANDARD: AM FCE

PRODUCT: hot rolled pickled sheet

TERMS OF DELIVERY: EN 10051 (2010)

QUALITY: AMSTRONG 355MC

ITEM **B08** **B07.2** **B08** **B13** **B07.1** **B07.1** **B09** **B10** **B11**
ITEM **COILNO** **PART** **WEIGHT** **AMOUNT** **LENGTH** **WIDTH** **LENGTH** **LENGTH**
 mm mm mm mm mm

3 6.00 1500.00 3000.00

| A08.2 ITEM | B07.1 COILNO | B07.1 PART | B08 WEIGHT | B08 AMOUNT | B13 HEAT | TENSILE TEST | | | BENDTEST/SHOCK TEST | | | | | | | | | |
|--------------|--------------|------------|------------|------------|----------|---------------|---------------------------|------------|---------------------|------------------------|-----------|-------------|-------------|-------------|-----------|-----|-----|-----|
| | | | | | | C02 PRTemp °C | C03 yield strength Re MPa | C11 Rm MPa | C12 A60 % | C13 Fa cm ² | C44 S0 °C | C42 KV2 1 J | C42 KV2 2 J | C42 KV2 3 J | C43 KV2 J | | | |
| 3 | 364794 | 99901 | 2805 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296754 | | | | | | | | | | | | | | | | |
| | | 364794 | 2805 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296755 | | | | | | | | | | | | | | | | |
| | | 364794 | 2800 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296756 | | | | | | | | | | | | | | | | |
| | | 364794 | 2800 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296757 | | | | | | | | | | | | | | | | |
| | | 364794 | 2800 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296758 | | | | | | | | | | | | | | | | |
| | | 364794 | 2800 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296759 | | | | | | | | | | | | | | | | |
| | | 364794 | 2800 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296760 | | | | | | | | | | | | | | | | |
| | | 364794 | 2805 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296761 | | | | | | | | | | | | | | | | |
| | | 364794 | 2800 | 13 | 457947 | 0 | 20 | 407 | 487 | 34.1 | 1 | .8 | 0 | -20 | 196 | 196 | 202 | 198 |
| | | 4296762 | | | | | | | | | | | | | | | | |
| TOTAL | 9 | | 25215 | | | | | | | | | | | | | | | |
| | 9 | | 25215 | | | | | | | | | | | | | | | |

We certify hereby that the delivery complies with the above mentioned specification.

C02 test direction relating to rolling direction (0° = L; 90° = T)

C04 specimen condition V:aqed F:resh N:normalised

C50 bend test 1:good

C43 result in J related to specimensize (C44)

QUALITY DEPARTMENT
 SITE EXPERT FOR INSPECTION
 Hesener

BREMEN 11.09.2015

JITZ 1.71